

SERIES 2000/2100

FIELD UPGRADEABLE DIGITAL PROCESS INDICATORS SINGLE INPUT OR DUAL INPUT

The Series 2000/2100 Smart System Digital Indicator embodies many features and performance capabilities to suit a wide range of indication and control requirements. It can accept a variety of standard process signals and precisely scale them into any desired unit of measurement. The indicator employs advanced technology for stable, drift free readout, while incorporating features that provide flexibility now and in the future with plug-in option cards. The option cards afford the opportunity to easily configure the indicator for the needs of the present while providing an upward migration path as control and indication needs evolve.

A full complement of options include relays, analog output and serial communication. NOSHOK calibrates all of its indicators to your transducer requirements at no additional cost. Simply tell us how you want it set up, then plug it in and go; no muss, no fuss and no charge!



FEATURES

- Field upgradeable with plug-in option cards
- 24 Vdc transmitter power supply
- 16 point scaling for non-linear processes
- Max. and min. value display
- Easy menu-driven programming
- NEMA 4X/IP65 sealed front bezel
- 4 set point alarms (with plug-in card)
- Analog output (with plug-in card)
- Serial communication (with plug-in card)
- PC software available for configuration
- AC or DC input power
- Signal totalizer for batch weighing or other timed input processes
- CE compliant
- Programmable signal response time
- Standard DIN panel cutout

APPLICATIONS

- Process indication
- On/Off pump controls
- Compressor controls
- Safety or shutdown alarms
- Local indication with signal retransmission to computer control system

SPECIFICATIONS

Input signals	Current, voltage or resistance
Process display	5 digit, 0.56" red LED, (-19999 to 99999)
Keypad	3 programmable function keys, 5 keys total
Power requirement	115/230 Vac or 11 Vdc to 36 Vdc (18 Vdc to 36 Vdc for 2100 Series)
Internal power supply	24 Vdc (18 Vdc for 2100 Series), unregulated
Electrical connection	Terminal blocks in rear
Memory	Non-volatile Eprom, will hold set up data for 10 years without power
Accuracy	±0.03 % of reading +3" A for 4 mA to 20 mA input; ±0.03 % of reading +3 mV for 0 Vdc to 5 Vdc and 0 Vdc to 10 Vdc inputs over the range of 18 °C to 28 °C
Update rate	Up to 20 times per second, adjustable (Up to 105 time per second, adjustable for 2100 Series)
Temperature ranges	Operating 32 °F to 122 °F (0 °C to 50 °C) Storage -40 °F to 140 °F (-40 °C to 60 °C)
Electromagnetic rating	CE compliant to EMC norm EN 61326:1997/A1:1998 RFI, EMI and ESD protection
Environmental protection	Nema 4X/IP65 sealed bezel only
Linearization	16 point scaling of non linear input
Dual relay option card	Two FORM-C relays. Rating: One relay energized; 5 amps @ 120/240 Vac/115/230 Vac or 28 Vdc (resistive load), 1/8 HP @ 120 Vac, inductive load. Total current not to exceed 5 amps with both relays energized
Quad relay option card	Four FORM-A relays. Rating: One relay energized; 3 amps @ 240 Vac or 30 Vdc (resistive load), 1/10 HP @ 120 Vac, inductive load. Total current not to exceed 4 amps with all four relays energized
Analog output option card	0 mA to 20 mA, 4 mA to 20 mA or 0 Vdc to 10 Vdc retransmitted signal
Quad NPN-OC option card	4 isolated open collector sinking transistors, 100 mA at maximum 30 Vdc
Quad PNP-OC option card	4 isolated open collector sourcing transistors, 24 Vdc with 30 mA total maximum
Communication option cards	RS232C or RS485

ORDERING INFORMATION					
SERIES 2000 (Single Input)	SERIES 2100 (Dual Input)				
Input signal	1 4 mA to 20 mA	2 0 Vdc to 5 Vdc	4 1 Vdc to 6 Vdc	5 0 Vdc to 10 Vdc	6 1 Vdc to 11 Vdc
Power requirements	1 115/230 Vac	3 11 Vdc to 36 Vdc			
Option cards	1 Dual relay option card	2 Quad relay option card	3 Quad NPN-OC option card		
	4 Quad PNP-OC option card	5 Analog output option card	6 RS 232-C serial communications option card		
	7 RS 485 serial communications option card	0 No option card			

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.


EXAMPLE

Series2000
 Input signal4 mA to 20 mA
 Power requirements115/230 Vac
 Option cardsDual relay option card


2000 - 1 - 1 - 1

OPTIONAL ACCESSORIES
 RS232C Mating Connector
 RS485 Mating Connector
 2000-50000 NEMA 4 Enclosure

Outline Dimensions

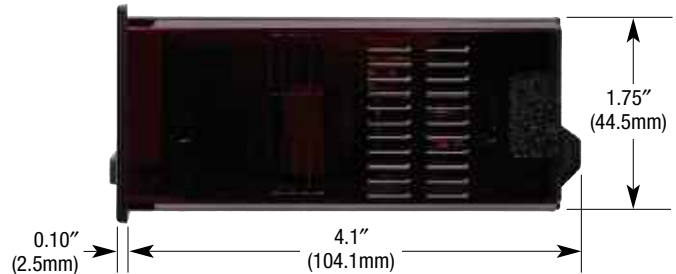

Typical Plug-in option card with on board terminals

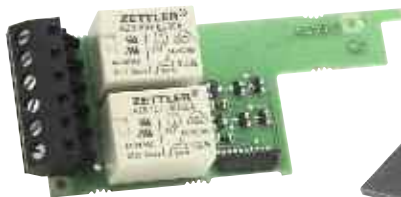

Available options are plug-in cards that provide alarm and setpoint relay outputs, analog and digital outputs, including RS 232-C and RS 485 functions.