



## Model 15KX, 16KX

### Small Volume High Pressure Regulator for Pressure Reducing & Relief


#### General Specifications

Flow Media (15 KX) All Non-Toxic Gases  
 (16 KX) Liquids & Gases  
 Flow Capacity See Capacity Chart 125-K-5  
 Operating Temperature Range -65 F to 165°F  
 End Connections 6000 psi only MS-33649-4\* FNPT  
 1000 psi only AMINCO  
 (other sizes & types available on special order)  
 Handwheel Turns to Full Pressure 25 Turns Approx.  
 Weight 8.5 lbs

#### Material Specifications

All Metal Parts in flow stream 18/8 Stainless Steel  
 Standard Diaphragm Material Nylon reinforced  
 Nitrile Rubber with Teflon shield  
 Standard Valve Material Nylon

Note: Model 16KX is for reducing service only (no relief system)

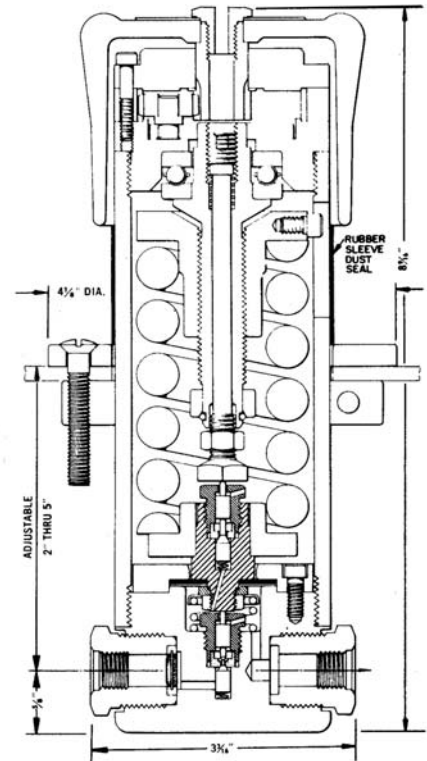

For mounting dimensions, see sheet W-15KX-B01

Model Number	Basic Fig. Number	Relief System	Max Inlet Pressure	Max CV	Inlet Valve Material
15KX	10931	YES	6000	0.018	Nylon
16KX	11060	NO	6000	0.018	Nylon
15KX	10932	YES	10000	0.018	Teflon & Cres
16KX	11229	NO	10000	0.018	Teflon & Cres

#### Ordering Information

Select Basic Figure Number from Above table and complete the Figure Number by coding the desired output pressure range and end connections as in example below.

Basic Fig. No.	Outlet Pressure Range	Code	End Connection	Code	End Connection	Code	Super Cleaned	Code
110929	10-2000 psi	K	For 10000 psi Inlet Only 4" AMINCO	S2	For 2000, 3500, and 6000 psi Inlet and/or Outlet 1/4" MS-33649-4* 1/4" NPT Female	L2 P2	No	A
	10-3500 psi	M						
	10-6000 psi	P						

Figure 10932S2P2A is the unique description of a 15KX combination reducing & relief regulator, 10000psi inlet, outlet pressure range 0-6000 psi with 1/4" Aminco inlet and 1/4" tube outlet not supercleaned. If inlet and outlet connections are the same, show only one code.

\*Replaces AND-10050-4

#### RedQ

#### Dresser, Inc.

2822 S. 1030 W.  
 Salt Lake City, Utah 84119  
 Phone: 801.487.2225 Fax: 801.487.2587  
 www.mooneycontrols.com

