



**Pressure Reducing Service
Aluminum Alloy & Stainless Steel**

Mity-Mite Model 94

General Specifications

Max Inlet Pressure...5000 psi
Max Outlet Pressure...3000 psi

Weight


Aluminum....1.6 lbs
CReS....4.6lbs

Flow Capacity

See capacity charts in
Mity Mite brochures

Note

Only Available with 1/4" End
Connections

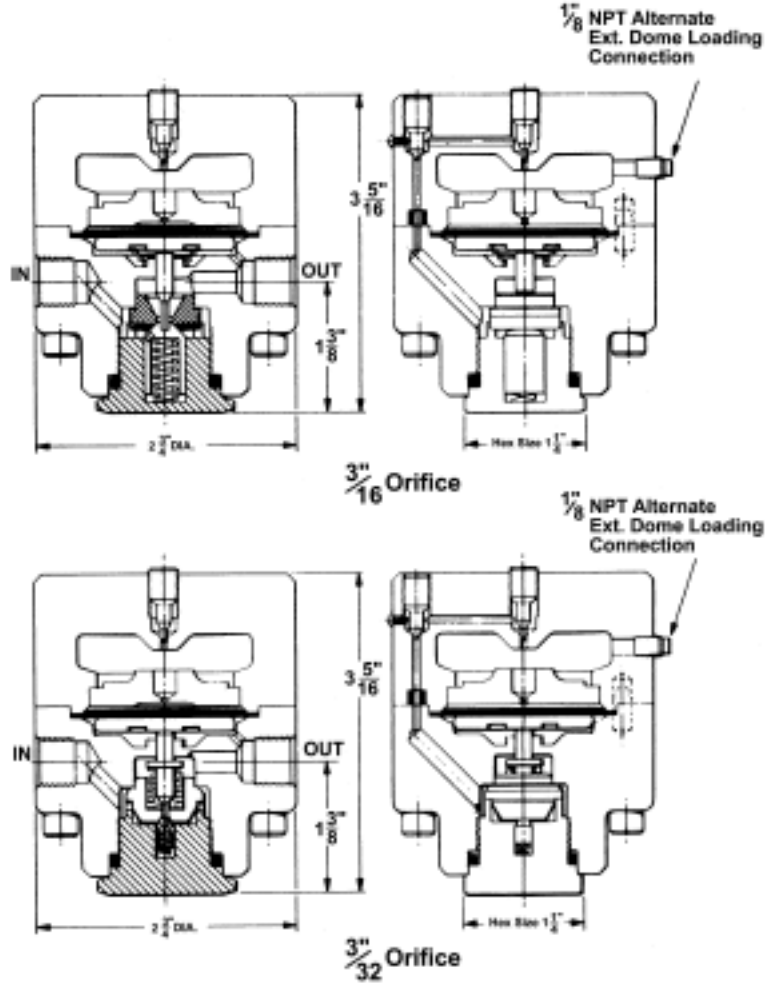

Ordering Information

Part	Figure Number	
	11486	11233
Body & Dome	Alum. Alloy	18-8 CReS
Trim	T416 CReS	17-4PH CReS

Orifice		
Size	Cv	Code
3/16	0.6	None
3/32	0.1	8

Trim Codes					
STD	Code	Material			
		Super Clean	Valve or Valve Seat	Seat Gasket	Rubber Goods
A*	B	Nylon	PCTFE	Nitrile	0°F to +165°F
C	D	Nylon	PCTFE	Nitrile	-65°F to +165°F
E	F	PCTFE	PCTFE	Nitrile	-0°F to +165°F
G	H	PCTFE	PCTFE	Nitrile	-65°F to +165°F
J	K	PCTFE	PCTFE	PCTFE	0°F to +165°F

End Connections	
Type	Code
1/4" NPT	P2*
1/4" MS33649	L2

Size	Code
1/8	1
1/4	2*
3/8	3
1/2	4

11486 P2 2 8 C

* Consult REDQ Regulator sales for applications that require Super Cleaning.



Dresser Pressure Regulation Group

2822 S. 1030 W.
Salt Lake City, Utah 84115

Phone: 801.487.2225 Fax: 801.487.2587
www.redqregulators.com

Dresser, Inc.